


HUB

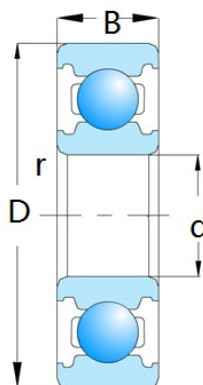

Bearing Designation	Dimension [mm]				Basic load ratings (kN)		Speed ratings(rpm)		Weight
	d	D	B	rs min	Cr	Cor	Grease	Oil	(Kg)
6200	10	30	9	0.6	5.1	2.38	20000	26000	0.032
6200 2RS	10	30	9	0.6	5.1	2.38	20000	26000	0.032
6200 ZZ	10	30	9	0.6	5.1	2.38	20000	26000	0.032
6201	12	32	10	0.6	6.82	3.05	19000	24000	0.04
6201 2RS	12	32	10	0.6	6.82	3.05	19000	24000	0.04
6201 ZZ	12	32	10	0.6	6.82	3.05	19000	24000	0.04
6202	15	35	11	0.6	7.65	3.72	18000	22000	0.045
6202 2RS	15	35	11	0.6	7.65	3.72	18000	22000	0.045
6202 ZZ	15	35	11	0.6	7.65	3.72	18000	22000	0.045
6203	17	40	12	0.6	9.58	4.78	16000	20000	0.065
6203 2RS	17	40	12	0.6	9.58	4.78	16000	20000	0.065
6203 ZZ	17	40	12	0.6	9.58	4.78	16000	20000	0.065
6204	20	47	14	1	12.8	6.65	14000	18000	0.106
6204 2RS	20	47	14	1	12.8	6.65	14000	18000	0.106
6204 ZZ	20	47	14	1	12.8	6.65	14000	18000	0.106
6205	25	52	15	1	14	7.85	13000	15000	0.128
6205 2RS	25	52	15	1	14	7.85	13000	15000	0.128

6200 Series

6205 ZZ	25	52	15	1	14	7.85	13000	15000	0.128
6206	30	62	16	1	19.5	11.3	11000	13000	0.2
6206 2RS	30	62	16	1	19.5	11.3	11000	13000	0.2
6206 ZZ	30	62	16	1	19.5	11.3	11000	13000	0.2
6207	35	72	17	1	25.7	15.4	9200	11000	0.29
6207 2RS	35	72	17	1	25.7	15.4	9200	11000	0.29
6207 ZZ	35	72	17	1	25.7	15.4	9200	11000	0.29
6208	40	80	18	1.1	29.5	18	8000	10000	0.37
6208 2RS	40	80	18	1.1	29.5	18	8000	10000	0.37
6208 ZZ	40	80	18	1.1	29.5	18	8000	10000	0.37
6209	45	85	19	1.1	31.5	20.5	7000	9000	0.42
6209 2RS	45	85	19	1.1	31.5	20.5	7000	9000	0.42
6209 ZZ	45	85	19	1.1	31.5	20.5	7000	9000	0.42